PEGASUS

ButyL-FOOT

1/2" Drive Fasteners
Use one tool for the entire
Pegasus Rail System installation

Optional Deck Attach Method

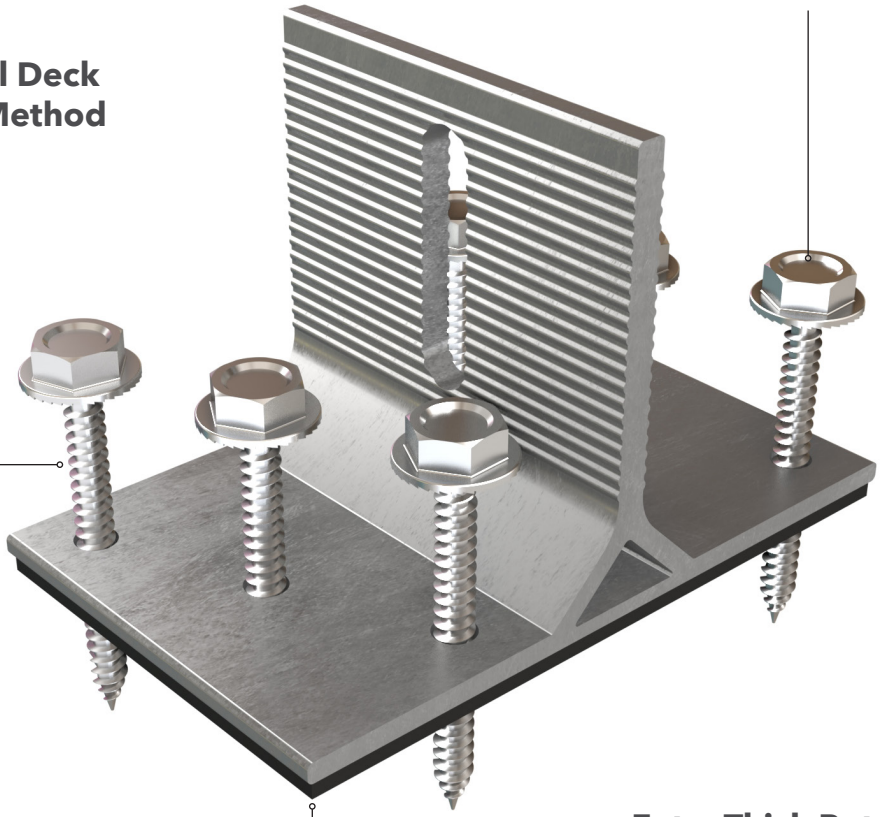

Extra Thick Butyl Tape
Conforms to un-even shingles

Simple Deck Attach Solution for Composite Roofs

The ButyL-Foot is a cost-effective solution to mount rails to composition shingle roofs. Pegasus' proprietary dual-purpose deck and rafter fasteners provide superior strength compared to standard screws.

25-Year Warranty
Manufactured with advanced materials and coatings to outlast the roof itself

Code Compliant
Fully IBC/CBC Code Compliant
Exceeds ASCE 7-16 Standards
UL2703 Certified

Mechanical Attachment
Extra Strength
Proprietary fastener design increases pull-out strength

Universal Fit
Universal Use
Installs into Rafters or Decking

Pegasus | 506 West Ohio Avenue, Richmond, CA 94804 | **www.pegasussolar.com**

ButyL-FOOT

1

Avoid installation when the temperature is below 32F or above 150F. ButyL-Foot must be installed on a dry surface.

Remove liner on butyl tape.



2

Shingle Joints
Avoid placing the ButyL-Foot directly over the joint between shingle sheets ("butt joints"). If unavoidable, fill butt joint up to the above shingle course with approved sealant.

Shingle Tabs
If the shingle tab height difference is more than 1/8inch, add in a spare shingle tab to level the ButyL-Foot.

Do not install fasteners in the gap between the shingle tabs.

3

Rafter Attach
Align ButyL-Foot with marked Rafter, and install 2 screws into rafter.

Rafter Attach
If Rafter is missed with 1st screw, install 2nd and 3rd screws into rafter using either the right or left pair of holes. **Do not strip the wood.**

Deck Attach
Install all 6 screws until snug. **Do not strip the wood.**

Check ButyL-Foot Span Tables for appropriate span between mounts.



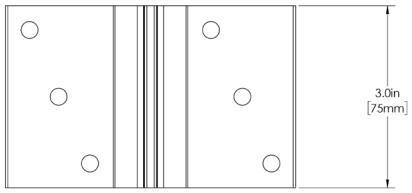

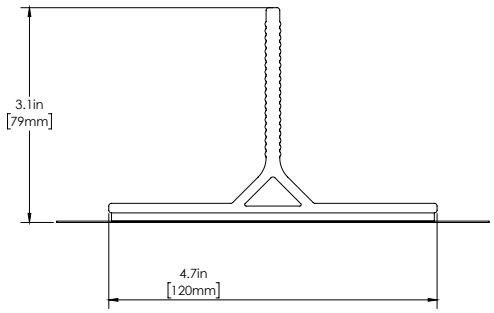



ButyL-FOOT	PBL-MDT
Finish	Mill
Kit Contents	Mill ButyL-foot, Pegasus, Dovetail T-bolt w/ Nut
Buy with	PF-DRW85 or PF-SF70
Attachment Type	Deck or Rafter Attached
Roof Type	Sloped Roof: Composition Shingle, Rolled Asphalt | Flat Roof: Modified Bitumen Roof, Built-Up Roof
Waterproofing	Extra-thick Butyl Tape; Instantly Waterproof
Installation Temperature Range	32°F to 150°F
Certifications	IBC, CBC, ASCE 7-16, UL2703 Certified
Kit Quantity	24 ButyL-Feet, 25 Dovetail T-bolts

All rights reserved. ©2026 Pegasus Solar Inc. See www.PS-IP.com for intellectual property details.

Failure to follow the exact installation instructions will void the Pegasus Solar Warranty.