



44-R[™]

THE DIRECT-TO-DECK SOLUTION FOR A VARIETY OF ROOF TYPES

The base plate of the 44-R utilizes 8 fasteners, allowing the system to be installed directly to the roof deck without engaging a rafter. The 44-R System can be used on low slope, flat, and SIPs (structural insulated panel) roofs, and with a variety of compression bracket options. 44-R is a customizable solution for new or existing roofs. Extensively tested for pullout and shear.

FEATURES & BENEFITS

- Patented watertight technology
- Specialized solution matches any proprietary hardware
- Compatible with a variety of Ecofasten brackets
- Wide footprint for optimal load dispersal
- Direct-to-deck attachment

CUSTOMIZABLE APPLICATION METHODS TO MEET YOUR NEEDS



Composition Shingle,
Low slope, SIPs




Rail-Based
Rail-Less



Structural-Attach
Direct-Attach




44-R™ THE DIRECT-TO-DECK SOLUTION FOR A VARIETY OF ROOF TYPES

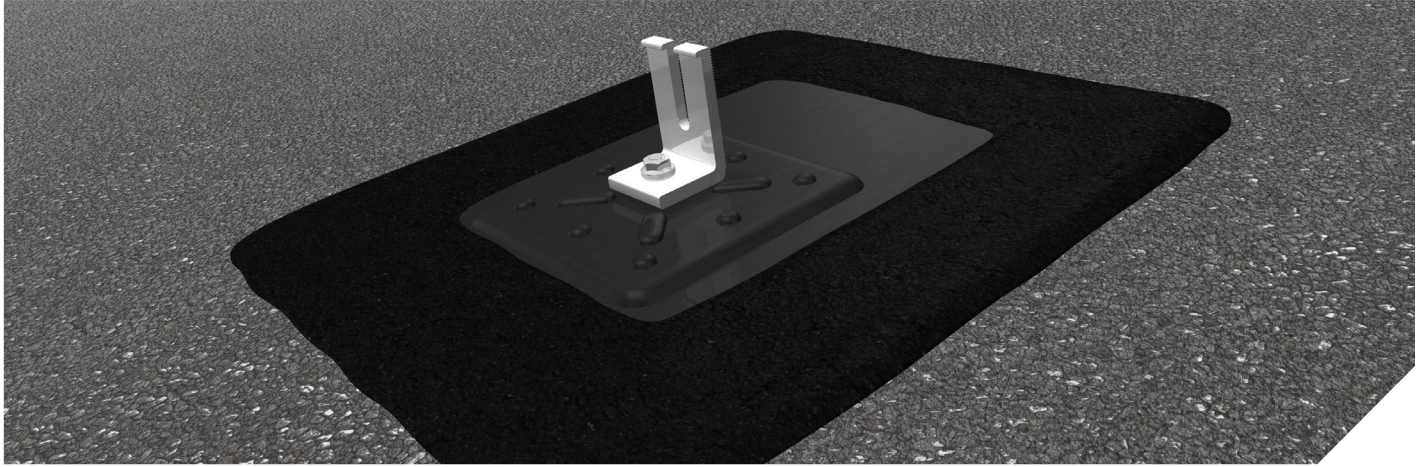

	PRODUCT IMAGE	PART NUMBER	PART DESCRIPTION	BOX QUANTITY	PALLET QUANTITY
	ASSEMBLED WITH (1) 3/8"-16X1" SS PEM AND INCLUDES (1) SS EPDM BONDED WASHER AND (1) SS FLANGE NUT				
BASE		3015013	44-R BASE SS 6X6"	25	1200
	INCLUDES (1) EPDM SEALING WASHER				
FLASHING		3015014	44-R FLASHING AL BLK 12X14"	50	3600
	INCLUDES (1) 3/8"-16 X 1 1/4" HEX BOLT AND (1) 3/8"-16 FLANGE NUT FOR RACKING				
BRACKETS		2012022	CF UNIV L-FOOT MLL 3" (NO HARDWARE NEEDED)	50	1800
		3011018	L-FOOT SCL-101 BLK 3"	50	6000
		3011015	L-FOOT L-102 BLK 3"	50	6000
		3011017	L-FOOT SCL-101 MLL 3"	50	6000
		3011016 *	L-FOOT L-102 MLL 6"	50	2400
	INCLUDES (1) 4" LAG SCREW AND (1) EPDM BONDED WASHER (PRE-ASSEMBLED)				
FASTENERS		3016010	DECK SCREW SS #15X2"	1000	60000
		3016011	DECK SCREW SS #15X3"	1000	60000
		3016012	DECK SCREW SS #15X4"	1000	45000

* SPECIAL ORDER ITEM

COMBINE BASE & FLASHING:

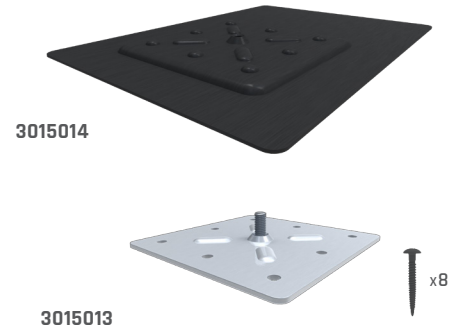

CHOOSE YOUR BRACKET:

