




A DIVISION OF QUICKSCREWS INTERNATIONAL CORP.

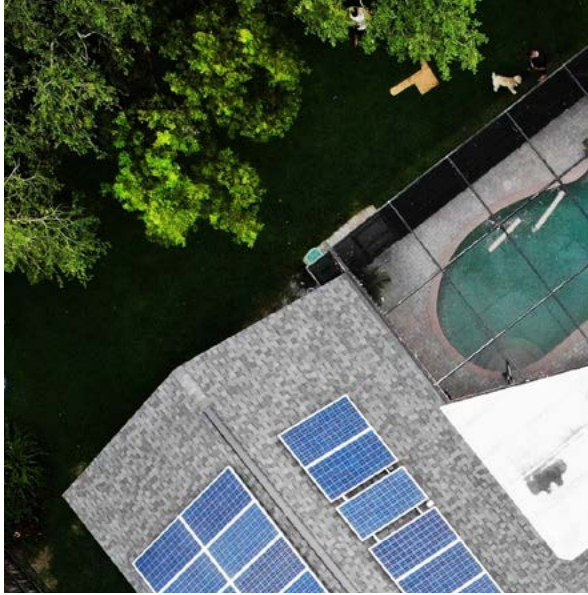

QB2 with Microflashing®. See page 5.

Distributed By:

2021 CATALOG

Take a look inside at QuickBOLT's innovative solar mounting solutions for Asphalt Shingle, Tile, TPO, and Stone Coated Steel roofs

WITH CLICKABLE LINKS

www.quickbolt.com
(844) 671-6045



ABOUT QUICKBOLT

At QuickBOLT, we believe solar mounting can be easier.
How do we work toward that belief?

We supply one of the widest ranges of innovative solar mounts for residential and commercial roofs in the US market. From our patented products to the custom production services we offer, QuickBOLT has been working with solar installers for nearly a decade to make solar installations easier than ever before.

Our highly experienced personnel are always ready to discuss your goals and concerns to ensure you get the solutions you need, when you need them.

Expert Advice Available
Monday - Friday
7am - 5pm PST
(844) 671-6045



DISCLAIMER:

We make every effort to ensure that all the information contained within our catalog is complete and accurate. QuickBOLT reserves the right to make any changes or corrections to any information which may have been published in error. Part numbers, quantities, and weights are subject to change without notice.

CONTENTS

4

ASPHALT, EPDM, & TPO ROOF MOUNTS

QuickBOLT: The Original Top Mount... **10**

11

ALL TILE ROOF MOUNTS

4" Microflashing@... **12**

Deck Mount... **13**

14

FLAT TILE ROOF MOUNTS

16

CURVED TILE ROOF MOUNTS

19

STONE COATED STEEL ROOF MOUNTS

Microflashing@: How It Works... **21**

22

CONDUIT MOUNTS

Saving time saves money. Do both with QB2... **23**

24

ACCESSORIES

Layers of Protection... **27**

THIS DIGITAL CATALOG HAS CLICKABLE LINKS:

- the table of contents above leads to pages
- product photos lead to their order pages



ASPHALT SHINGLE, EPDM, & TPO ROOF MOUNTS

QuickBOLT has the most innovative line of Asphalt Shingle Roof Mounts in the industry.

Our QuickBOLT with Microflashing® is the future of Asphalt Shingle Roof solar mounting. Use the QuickBOLT to save time and money by installing faster, eliminating the need for bulky aluminum flashing, and completing more residential jobs. The installers' liability is also reduced, as Microflashing® can be installed directly over the shingles and does not require the removal of any nails. The QuickBOLT is now tested and approved for TPO roofs.



AVAILABLE ONLINE:



UL Certification



Specs & Test
Results



Racking
Compatibility




Installation
Instructions



Videos



DECK MOUNT Fixed Height

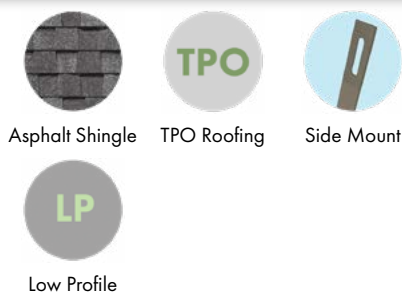


PN#	BOX QTY
16317	Mounts (36) + 5/16 X 1 3/4" Hex Lags w/ Umbrella Washers (144)
16318	Black Mounts (36) + 5/16 X 1 3/4" Hex Lags w/ Umbrella Washers (144)

Direct to deck - no need to attach to rafters
Fastest installation in the industry
T-Foot Mount is backed with silicone
Now tested & approved for TPO roofs
UL Certified



QB2 With 3" Microflashing® | Fixed Height

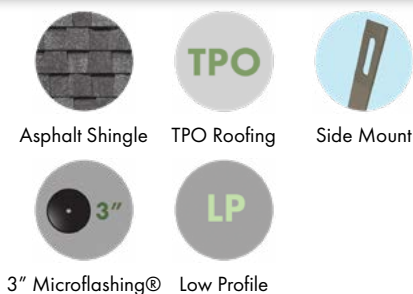


PN#	BOX QTY
17660	4" QB2 Bolts (25)
17662	4" QB2 Bolts + L-Foot + 3" Microflashing® (25ea.)
17862	4" QB2 Bolts + Blk L-Foot + 3" Microflashing® (25ea.)

Only 3 components
Fastest installation in the industry
Dual Drive Shoulder Screw
Now tested & approved for TPO roofs
Sealant is optional
UL Certified



QB2 With 4" Microflashing® | Fixed Height

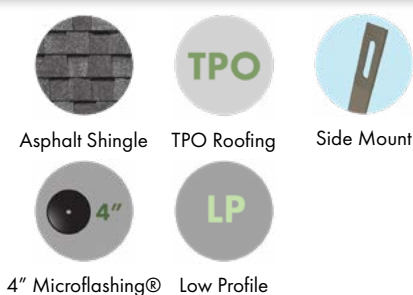


PN#	BOX QTY
17660	4" QB2 Bolts (25)
17663	4" QB2 Bolts + L-Foot + 4" Microflashing® (20ea.)
17863	4" QB2 Bolts + Blk L-Foot + 4" Microflashing® (20ea.)

Only 3 components
Fastest installation in the industry
Now tested & approved for TPO roofs
4" Microflashing® provides more coverage
Sealant is optional
UL Certified



LOW PROFILE QB1 With 3" Microflashing® | Fixed Height

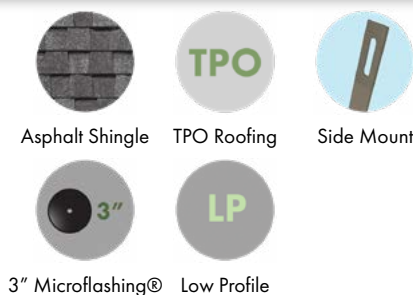

PN#	BOX QTY
17664	5.25" Bolts (25)
17666	Bolts + 3" Microflashing® (25ea.)
17667SS	Bolts + 3" Microflashing® + SS L-Foot + Nuts (25ea.)

First & only Microflashing® in the industry
Stainless Steel L-Foot
Now tested & approved for TPO roofs
UL Certified



LOW PROFILE QB1

With 4" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17664	5.25" Bolts (25)
17720	Bolts + 4" Microflashing® (25ea.)
17721 SS	Bolts + 4" Microflashing® + SS L-Foot + Nuts (20ea.)

First & only Microflashing® in the industry
Stainless Steel L-Foot
4" Microflashing® provides more coverage
Now tested & approved for TPO roofs
UL Certified



DUAL FLASHED LOW PROFILE QB1

With Miniflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17667DF	5 1/4" Bolts (50) + 3" Microflashing® (50) + Miniflashing® + SS L-Foot (50) + Nuts (50)

Low Profile QB1 with Microflashing® and
Miniflashing®

No sealant required!



7" QB1

With 3" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17670	7" Bolts (25)
17671	Bolts + 3" Microflashing® (25ea.)
17672SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry
Stainless Steel L-Foot
Now tested & approved for TPO roofs
UL Certified



7" QB1

With 4" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17670	7" Bolts (25)
17723	Bolts + 4" Microflashing® (25ea.)
17724SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry
Stainless Steel L-Foot
4" Microflashing® provides more coverage
Now tested & approved for TPO roofs
UL Certified



8" QB1 With 3" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17678	8" Bolts (25)
17679	Bolts + 3" Microflashing® (25ea.)
17680SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry
Stainless Steel L-Foot

Longer Bolt provides more support

Now tested & approved for TPO roofs

UL Certified



8" QB1 With 4" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17678	8" Bolts (25)
17726	Bolts + 4" Microflashing® (25ea.)
17727SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry
Stainless Steel L-Foot

4" Microflashing® provides more coverage

Longer Bolt provides more support

Now tested & approved for TPO roofs

UL Certified



9" QB1 With 3" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17686	9" Bolts (25)
17687	Bolts + 3" Microflashing® (25ea.)
17688SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry
Stainless Steel L-Foot

Longer Bolt provides more support

Now tested & approved for TPO roofs

UL Certified



9" QB1 With 4" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17686	9" Bolts (25)
17729	Bolts + 4" Microflashing® (25ea.)
17730SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry
Stainless Steel L-Foot

4" Microflashing® provides more coverage


Longer Bolt provides more support

Now tested & approved for TPO roofs

UL Certified



3" & 4" MICROFLASHING® For QuickBOLT




Patent #8448407

PN#	BOX QTY
17669	3" Microflashing® (25)
17659	4" Microflashing® (20)

First & only Microflashing® in the industry
Original Microflashing® design
EPDM on bottom, Stainless Steel on top
Compression-seals to composite shingle roof
Zero Reported Leaks
Now tested & approved for TPO roofs
UL Certified



LOW PROFILE L-FOOT For QuickBOLT2




PN#	BOX QTY
17661	SS L-Foot for QB2 (25)
17861	Black L-Foot for QB2 (25)

Stainless Steel
Rail slot for adjustability connecting T-Bolts



LOW PROFILE L-FOOT For QuickBOLT1




PN#	BOX QTY
15894SS	SS L-Foot for Low Profile QB1 (25)

Stainless Steel
Rail slot for adjustability connecting T-Bolts



TALL L-FOOT For QuickBOLT



PN#	BOX QTY
15987BSS	SS Tall L-Foot (80)

Stainless Steel
Rail slot for adjustability connecting T-Bolts



OFFSET L-FOOT For QuickBOLT1



Asphalt Shingle



TPO Roofing



Side Mount

PN#	BOX QTY
15891SS	SS Offset L-Foot for QB1 (25)

Stainless Steel
Rail slot for adjustability connecting T-Bolts



FLASHED L-FOOT MOUNTING KIT Fixed Height | Black Galva Flashing



Asphalt Shingle



Side Mount



Screw Kits

PN#	BOX QTY	SCREW SIZE
17713SS	Flashing + L-Foot + Screws (20ea.)	5/16" x 4"

Stainless Steel L-Foot mounting system
Stronger than Aluminum Flashing




FLASHED SPLIT TOP L-FOOT KIT Adjustable | Black Galva Flashing



Asphalt Shingle



Side Mount



Screw Kits



Adjustable

PN#	BOX QTY	SCREW SIZE
17717SS	Flashing + L-Foot + Dacro Screws with Sealing Washer (20ea.)	1/4 X 3"

Stainless Steel L-Foot mounting system
Stronger than Aluminum Flashing


QuickBOLT: The Original Top Mount

8 years ago our competitors said top mount installation methods would never work, installers will never go for it, and you can't get around lifting shingles. Well that wasn't good enough. We took the leap anyways, because we believed not lifting shingles was the answer to installer's problems. We believed solar mounting could be easier.

We heard how traditional flashing was falling short, and we acted. For 8 years since then, installers have been adopting QuickBOLT's compression-sealing method and **for 8 years we've continually proven this method to be tried and true** for speed and effect. Our recommendation of installing over the shingle has steadily become the fastest growing solution amongst our customers AND our competitors - and we couldn't be more excited!

Each year that goes by makes QuickBOLT the longest standing top mount solution on the market, and with zero reported leaks. But don't just take it from us, hear it from YOUR competitors in our customer testimonials. They'll prove to you why you should try out the QuickBOLT on your next project.

Scan QR code to watch video.



There may be other top mount solutions on the market but none of them have been on roofs as long as the QuickBOLT.

Plus, QuickBOLT is the ONLY compression-sealed top mount solution in the industry.

Why get the knock-offs when you can have the original?

8 Years Ahead of the Curve...

Patent #8448407



2012

The Original
QuickBOLT



2016

QuickBOLT1



2020

QuickBOLT2

QB1, LOW PROFILE QB1, QB2. See pages 5-7.



ALL TILE ROOF MOUNTS

QuickBOLT's line of All Tile Roof Mounts are the most popular QuickBOLT products because of their versatility.

Our All Tile Roof Mounts work on Curved and Flat Tile roofs, providing an alternative to stocking multiple SKUs and allowing you to reduce your inventory to a single part.

The wide range of adjustability and leverage points ensure that installers can use these mounts with any tile roofing style and work around inconveniently located rafters.



AVAILABLE ONLINE:



UL Certification



Specs & Test
Results



AZ Test Results



Racking
Compatibility



Installation
Instructions



Videos

90° ALL TILE ROOF MOUNT

34mm - 42mm Height Range



Flat Tile




Curved Tile




Side Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17700	10 Hooks	N/A
17702	10 Hooks/20 Screws	1/4" x 3"
17704	10 Hooks/20 Screws	5/16" x 3"

145.4mm arm length
161mm-169mm height off roof

UL Certified

90° ALL TILE ROOF MOUNT

34mm - 42mm Height Range | Long Arm



Flat Tile



Curved Tile




Side Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17585	10 Hooks	N/A
17587	10 Hooks/20 Screws	5/16" x 3"
17589	10 Hooks/20 Screws	1/4" x 3"

120mm arm length
181mm-189mm height off roof

UL Certified

180° ALL TILE ROOF MOUNT

34mm - 42mm Height Range



Flat Tile




Curved Tile




Bottom Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17578	10 Hooks	N/A
17600	10 Hooks/20 Screws	5/16" x 3"
17616	10 Hooks/20 Screws	1/4" x 3"

UL Certified

NO ONE HITS THE BULLSEYE EVERY TIME

With an extra inch in diameter, the new 4" Microflashing® will have your back even if you miss the rafter on your first try. Install on Asphalt Shingle Roofs without worrying about leaking!

Microflashing®. See page 8.



DECK MOUNT



LESS ROOM FOR ERROR!

Our newest mounting system, the Deck Mount for Asphalt Shingle roofs, can be installed directly into the deck without the need for finding rafters! Install in 20 seconds with 4 Stainless Steel screws. The base of the mount has Silicon embedded into it and is secured to the roof with Stainless Steel Screws assembled with Umbrella Washers for superior holding and water protection. The Deck Mount comes with our 25 year manufacturer's warranty. The L-Foot is built into the mount and comes with all hardware needed at an extremely low cost.

SKIP THE RAFTER

**MOUNT
ANYWHERE**

NO PREDRILLING

Deck Mount. See page 5.



FLAT TILE ROOF MOUNTS

QuickBOLT's line of Flat Tile Roof Mounts are the simple solution to installing solar on Flat Tile Roofs.

These durable mounts eliminate the need to drill through tiles, reducing install time and liability.

Our Heavy Duty [HD+] Flat Tile Mounts are ideal for high wind areas or installers who want to decrease the number of mounts needed to support an array.

	Mount Thickness	Span Length	Average Maximum Compression Load	Average Maximum Tensile Load
Flat Tile Mount	5mm	4 ft.	141 lbs.	203 lbs.
[HD+] Flat Tile Mount	7mm	6 ft.	691 lbs.	2222 lbs.



AVAILABLE ONLINE:



UL Certification



Specs & Test Results



AZ Test Results



Racking Compatibility



Installation Instructions



Videos



90° FLAT TILE ROOF MOUNT

Fixed Height | 5mm Stainless Steel




Flat Tile



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17540	20 Hooks	N/A
17542	20 Hooks/40 Screws	1/4" x 3"
17608	20 Hooks/40 Screws	5/16" x 3"

UL Certified



180° FLAT TILE ROOF MOUNT

Fixed Height | 5mm Stainless Steel




Flat Tile



Bottom Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17544	20 Hooks	N/A
17546	20 Hooks/40 Screws	1/4" x 3"
17610	20 Hooks/40 Screws	5/16" x 3"

UL Certified



90° [HD+] FLAT TILE ROOF MOUNT

Fixed Height | 7mm Stainless Steel



Flat Tile



Side Mount



Heavy Duty



Screw Kits

PN#	BOX QTY	SCREW SIZE
17632	20 Hooks	N/A
17636	20 Hooks/40 Screws	5/16" x 4"

Can support a higher load
Less penetrations in the roof
For high wind areas

UL Certified



180° [HD+] FLAT TILE ROOF MOUNT

Fixed Height | 7mm Stainless Steel



Flat Tile



Bottom Mount



Heavy Duty



Screw Kits

PN#	BOX QTY	SCREW SIZE
17638	20 Hooks	N/A
17642	20 Hooks/40 Screws	5/16" x 4"

Can support a higher load
Less penetrations in the roof
For high wind areas

UL Certified



CURVED TILE ROOF MOUNTS

Installers today can work on a wider variety of roofs than ever before with QuickBOLT's extensive line of Curved Tile Roof Mounts.

Our adjustable mounts have multiple leverage points and base widths to overcome inconveniently located rafters.

At QuickBOLT, we take pride in being able to provide such a versatile line of mounting solutions for curved tile roofs, the most popular roofing style in our home state of California.



AVAILABLE ONLINE:



UL Certification



Specs & Test
Results



AZ Test Results



Racking
Compatibility



Installation
Instructions



Videos



90° CURVED TILE ROOF MOUNT


Fixed Height | 180mm Wide Base



Curved Tile




Side Mount



Screw Kits

PN#	BOX QTY	SCREW SIZE
17508	20 Hooks	N/A
17510	20 Hooks/40 Screws	1/4" x 3"

UL Certified

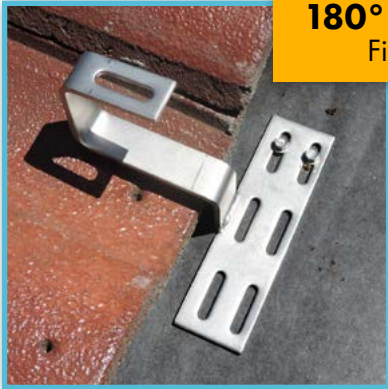

180° CURVED TILE ROOF MOUNT


Fixed Height | 180mm Wide Base



Curved Tile




Bottom Mount



Screw Kits

PN#	BOX QTY	SCREW SIZE
17512	10 Hooks	N/A
17514	10 Hooks/20 Screws	1/4" x 3"

UL Certified

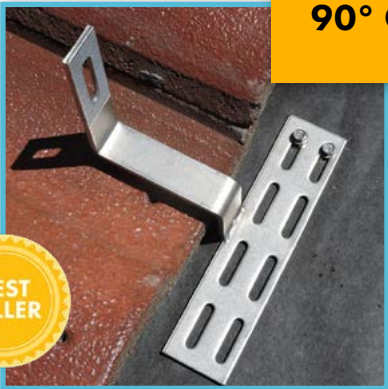

90° CURVED TILE ROOF MOUNT

225mm Wide Base




Curved Tile



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17706	20 Hooks	N/A
17708	20 Hooks/40 Screws	1/4" x 3"
17710	20 Hooks/40 Screws	5/16" x 3"

Wider Base for more versatility

UL Certified



180° CURVED TILE ROOF MOUNT

Adjustable Top | 105mm - 139mm Range




Curved Tile



Bottom Mount



Adjustable



Screw Kits

PN#	BOX QTY	SCREW SIZE
17516	10 Hooks	N/A
17518	10 Hooks/20 Screws	1/4" x 3"

Adjustable top for level array

UL Certified



90° CURVED TILE ROOF MOUNT

For Clay Tiles | 69mm - 91mm Height Range




Curved Tile



Side Mount



Adjustable



Screw Kits

PN#	BOX QTY	SCREW SIZE
17520	10 Hooks	N/A
17522	10 Hooks/20 Screws	1/4" x 3"

UL Certified



180° CURVED TILE ROOF MOUNT

For Clay Tiles | 69mm - 91mm Height Range



Curved Tile




Bottom Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17524	10 Hooks	N/A
17526	10 Hooks/20 Screws	1/4" x 3"
17528	10 Hooks/20 Screws	5/16" x 3"

UL Certified



90° CURVED TILE ROOF MOUNT

42mm - 50mm Height Range



Curved Tile




Side Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17568	10 Hooks	N/A
17570	10 Hooks/20 Screws	1/4" x 3"
17572	10 Hooks/20 Screws	5/16" x 3"

Three points of adjustability

UL Certified



90° CURVED TILE ROOF MOUNT

42mm - 50mm Height Range




Curved Tile



Side Mount



Adjustable



Screw Kits

PN#	BOX QTY	SCREW SIZE
17574	10 Hooks	N/A
17576	10 Hooks/20 Screws	5/16" x 3"

Five points of adjustability

UL Certified



STONE COATED STEEL ROOF MOUNTS

QuickBOLT is one of the only suppliers of mounting solutions for Stone Coated Steel Roofs in America.

Stone Coated Steel is widely used among older homes.

Installers often refused to work on Stone Coated Steel roofs in the past because of the limited solutions available on the market. These hooks now give installers the opportunity to efficiently provide solar to homeowners with these roofs.

Available in styles that work with roofs with or without battens.



AVAILABLE ONLINE:



UL Certification



Specs & Test
Results



Installation
Instructions



Videos



90° ROOF MOUNT

Fixed Height | 76.20mm Batten Bridge




SCS



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17620	20 Hooks	N/A
17622	20 Hooks/40 Screws	1/4" x 3"
17624	20 Hooks/40 Screws	5/16" x 3"

UL Certified



180° ROOF MOUNT

Fixed Height | 63.50mm Batten Bridge




SCS



Bottom Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17536	20 Hooks	N/A
17538	20 Hooks/40 Screws	1/4" x 3"
17606	20 Hooks/40 Screws	5/16" x 3"

UL Certified



90° ROOF MOUNT

32mm - 48mm Range | 63.50mm Batten Bridge



SCS




Side Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17548	20 Hooks	N/A
17550	20 Hooks/40 Screws	1/4" x 3"
17612	20 Hooks/40 Screws	5/16" x 3"

UL Certified



180° ROOF MOUNT

32mm - 48mm Range | 63.50mm Batten Bridge



SCS




Bottom Mount



Adjustable



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17552	20 Hooks	N/A
17554	20 Hooks/40 Screws	1/4" x 3"
17614	20 Hooks/40 Screws	5/16" x 3"

UL Certified



90° ROOF MOUNT


Fixed Height | For Use on Roofs with No Batten




SCS



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17626	20 Hooks	N/A
17628	20 Hooks/40 Screws	1/4" x 3"
17630	20 Hooks/40 Screws	5/16" x 3"

UL Certified

MICROFLASHING®

HOW IT WORKS



Microflashing®, comprised of a Stainless Steel backed EPDM washer, is installed on top of the roofing - no removing nails or lifting shingles



The collar on the patented QuickBOLT compresses and concaves the Microflashing® to create a watertight seal

Use manufacturer's approved sealant on the underside of the Microflashing® to help it completely adhere to the roofing surface



This is our Microflashing® after being installed for only 3 weeks. As you can see, the asphalt from the roof itself has bonded with the EPDM; forming a leak proof seal.



The only product on the market that doesn't just divert water, but also seals the penetration.

Try it for yourself today!

QuickBOLT with Microflashing®. See page 6-7.



CONDUIT MOUNTS

At QuickBOLT, we are experts on mounts and conduit supports are no exception. Our electrical conduit solutions offer great flexibility in bundling cables and wires.

Designed for securing and supporting conduit.

We offer a variety of solutions for Asphalt Shingle, TPO, EPDM and Curved Tile roofs so you can choose the option that suits your job best.



AVAILABLE ONLINE:



Specs & Test
Results



Installation
Instructions



Videos



QUICK RATCHET CONDUIT CLAMP

For QuickBOLT Mounting Kits



Asphalt Shingle



TPO Roofing

PN#	BOX QTY	SCREW SIZE
16255	10 Clamps	N/A

For running conduit

Attaches directly to any QuickBOLT

Offers flexibility in bundling cables/wires



CONDUIT MOUNTING BRACKET

Fixed Height | 38mm Bridge



Curved Tile

PN#	BOX QTY	SCREW SIZE
17734	60 Brackets	N/A

For running conduit

Offers flexibility in bundling cables/wires


Only 1 part for fast installation



2 1/4" EPDM ASPHALT CONDUIT MOUNT WITH SCREW



Asphalt Shingle



Screw Kits


PN#	BOX QTY	SCREW SIZE
16321	2 1/4" x 7/8" thick mount + screw (60/Case)	1/4" x 2"
16322	2 1/4" x 7/8" thick mount + screw (20/PK)	1/4" x 2"

For running conduit

Offers flexibility in bundling cables/wires

*Block and screw only. Clip NOT included

Saving time saves money. Do both with QB2!



15 sec per mount

12.5 min per system*

Microflashing®

VS.



75 sec per mount

62.5 min per system*

Traditional Flashing

Time does not include predrilling pilot holes

* 50 mount average calculated for a 7kW system

QB2 with Microflashing®
See page 5



ACCESSORIES

QuickBOLT's most prominent accessories are our Solar Mounting Screws.

These screws are fully threaded to allow the screw to engage deeper into the wood, which gives it greater holding power than a partially threaded screw. The coarse threading reduces the torque when driving into the wood, reducing installation time. The Type 17 Auger Point clears debris out of the pilot hole, which reduces stress and splitting in wood. If you don't predrill the hole all of the way through, this point will finish it for you.



AVAILABLE ONLINE:





UL Certification



Specs & Test
Results

5/16" SOLAR MOUNT SCREWS

302 Stainless Steel





Screws

PN#	BOX QTY	SCREW SIZE
16988	20 Screws	5/16" x 3"
16990	40 Screws	5/16" x 3"
16989	20 Screws	5/16" x 3½"
16993	20 Screws	5/16" x 4"
16991	40 Screws	5/16" x 4"
15433	Nut Setter	1/2"

Hex Washer Head
Coarse Thread
Type 17 Point

1/4" SOLAR MOUNT SCREWS

302 Stainless Steel



Screws

PN#	BOX QTY	SCREW SIZE
17556	20 Screws	1/4" x 3"
17558	40 Screws	1/4" x 3"
17559	20 Screws	1/4" x 4"
15437	Nut Setter	3/8"

Hex Washer Head
Coarse Thread
Type 17 Point

GALVA FLASHING

For Wide Based Roof Hooks



Flat Tile

Curved Tile

PN#	BOX QTY	SCREW SIZE
15890	20 Flashings	N/A

Flashing for wide based Hooks
Stronger than Aluminum Flashing

GALVA FLASHING

For Flat Tile Roof Hooks



Flat Tile

PN#	BOX QTY	SCREW SIZE
15991	40 Flashings	N/A

Flashing for Flat Tile Hooks
Stronger than Aluminum Flashing

QB1 & QB2 DRIVERS

For the QuickBOLT



PN#	BOX QTY	SIZE
17665	1 Driver for QB1	M6
17655	1 Driver for QB2	1/2" x 4"

For driving the QB1 and QB2

HEX HEAD BOLTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15670	20 Bolts	3/8" x 3/4"
15895	50 Bolts	5/16" x 3"

For rail attachment

T-BOLTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15990	20 Bolts	5/16" x 3/4"
15988	100 Bolts	M8 x 25MM
15998	20 Bolts	3/8" x 3/4"
15999	20 Bolts	3/8" x 1"

For rail attachment

FLANGE NUTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15669	20 Nuts	3/8-16"
15879	20 Nuts	5/16-18"
15989	100 Nuts	M8

For securing L-Foot to QuickBOLT

LAYERS OF PROTECTION

Low Profile QuickBOLT with Microflashing®. See page 5 & 6.



MANUFACTURERS'
APPROVED SEALANT



MICROFLASHING®



QUICKBOLT
COLLAR



L-FOOT

OVER 1 MILLION QUICKBOLTS INSTALLED | 0 REPORTED LEAKS

AVAILABLE ONLINE

INFORMATIONAL VIDEOS

QuickBOLT provides its users with a wide range of informational videos. From installation videos to product knowledge to industry updates, we pride ourselves on creating helpful videos for our customers.

***NEW:** Check our Youtube Quickies: short chats with our customers about their experiences with QuickBOLT.



PRODUCT PACKETS

All of our Roof Mounts have their own product packet, making your job easier. Submit to your AHJ for streamlined approval. Each packet includes:

- Spec Sheets
- Test Results
- UL Certification (when applicable)
- AZ Testing (when applicable)
- Racking Compatibility (when applicable)
- Installation Instructions

QuickBOLT with Microflashing®. See page 6-7.



www.quickbolt.com
(844) 671-6045

Corporate Headquarters
5830 Las Positas Road
Livermore, CA 94551